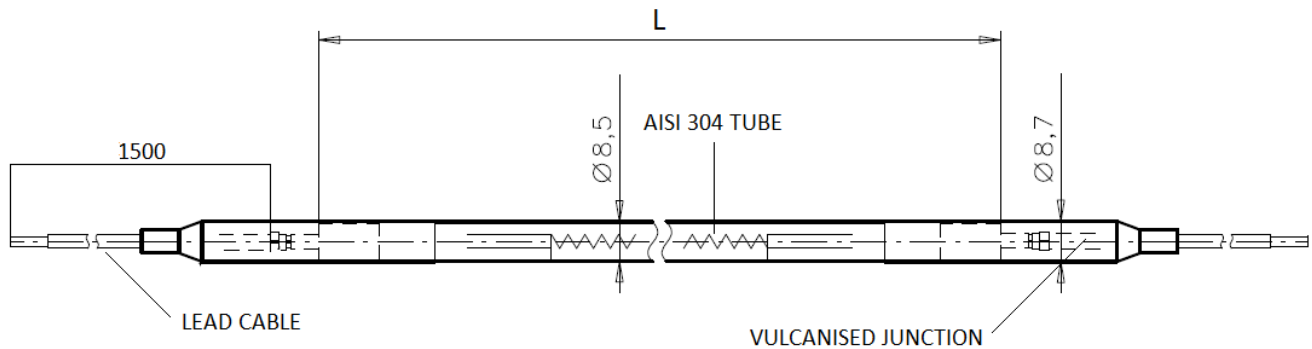


DEFROSTING TUBULAR HEATER - RSSx

The RSSx is a tubular steel resistance used on the evaporators refrigerating system which aims to defrost finned bodies. It is extremely flexible and considered as a practical solution thanks to its capacity to adopt the features of the various types of evaporator. It is possible to have different characteristics (Voltage-Wattage-Length) from the standard ones, according to customer's requests.

SKETCH**GENERAL FEATURES**

VOLTAGE	POWER (W)	LENGTH L mm	SECTION		
230	130	400	1mm ²		
230	200	500	1mm ²		
230	200	600	1mm ²		
230	225	700	1mm ²		
230	250	800	1mm ²		
230	300	900	1mm ²		
230	300	950	1mm ²		
230	330	1000	1mm ²		
230	300	1100	1mm ²		
230	400	1300	1mm ²		
230	550	1500	1mm ²		
230	700	1700	1mm ²		
230	800	1900	1mm ²		
230	875	2100	1mm ²		
230	1000	2300	1,5mm ²		
230	1100	2550	1,5mm ²		
230	1200	2700	1,5mm ²		
230	1300	3000	1,5mm ²		
230	1345	3100	1,5mm ²		
230	1395	3300	1,5mm ²		
230	1445	3500	1,5mm ²		

PROVISIONS AND REFERENCE HOMOLOGATIONS

- Design, manufacture and testing in compliance with harmonized standards EN 60335
- In compliance with 2006/95/EEC DIRECTIVE
- CE declaration of conformity on all items

GENERAL TESTS AND PACKING

All Calorflex heating cables are singularly electrically tested before being delivered to the customer using a special packing designed to guarantee the integrity and safety of the material during the handling, transport and storage.